












AD

SOLAR SMART BUS

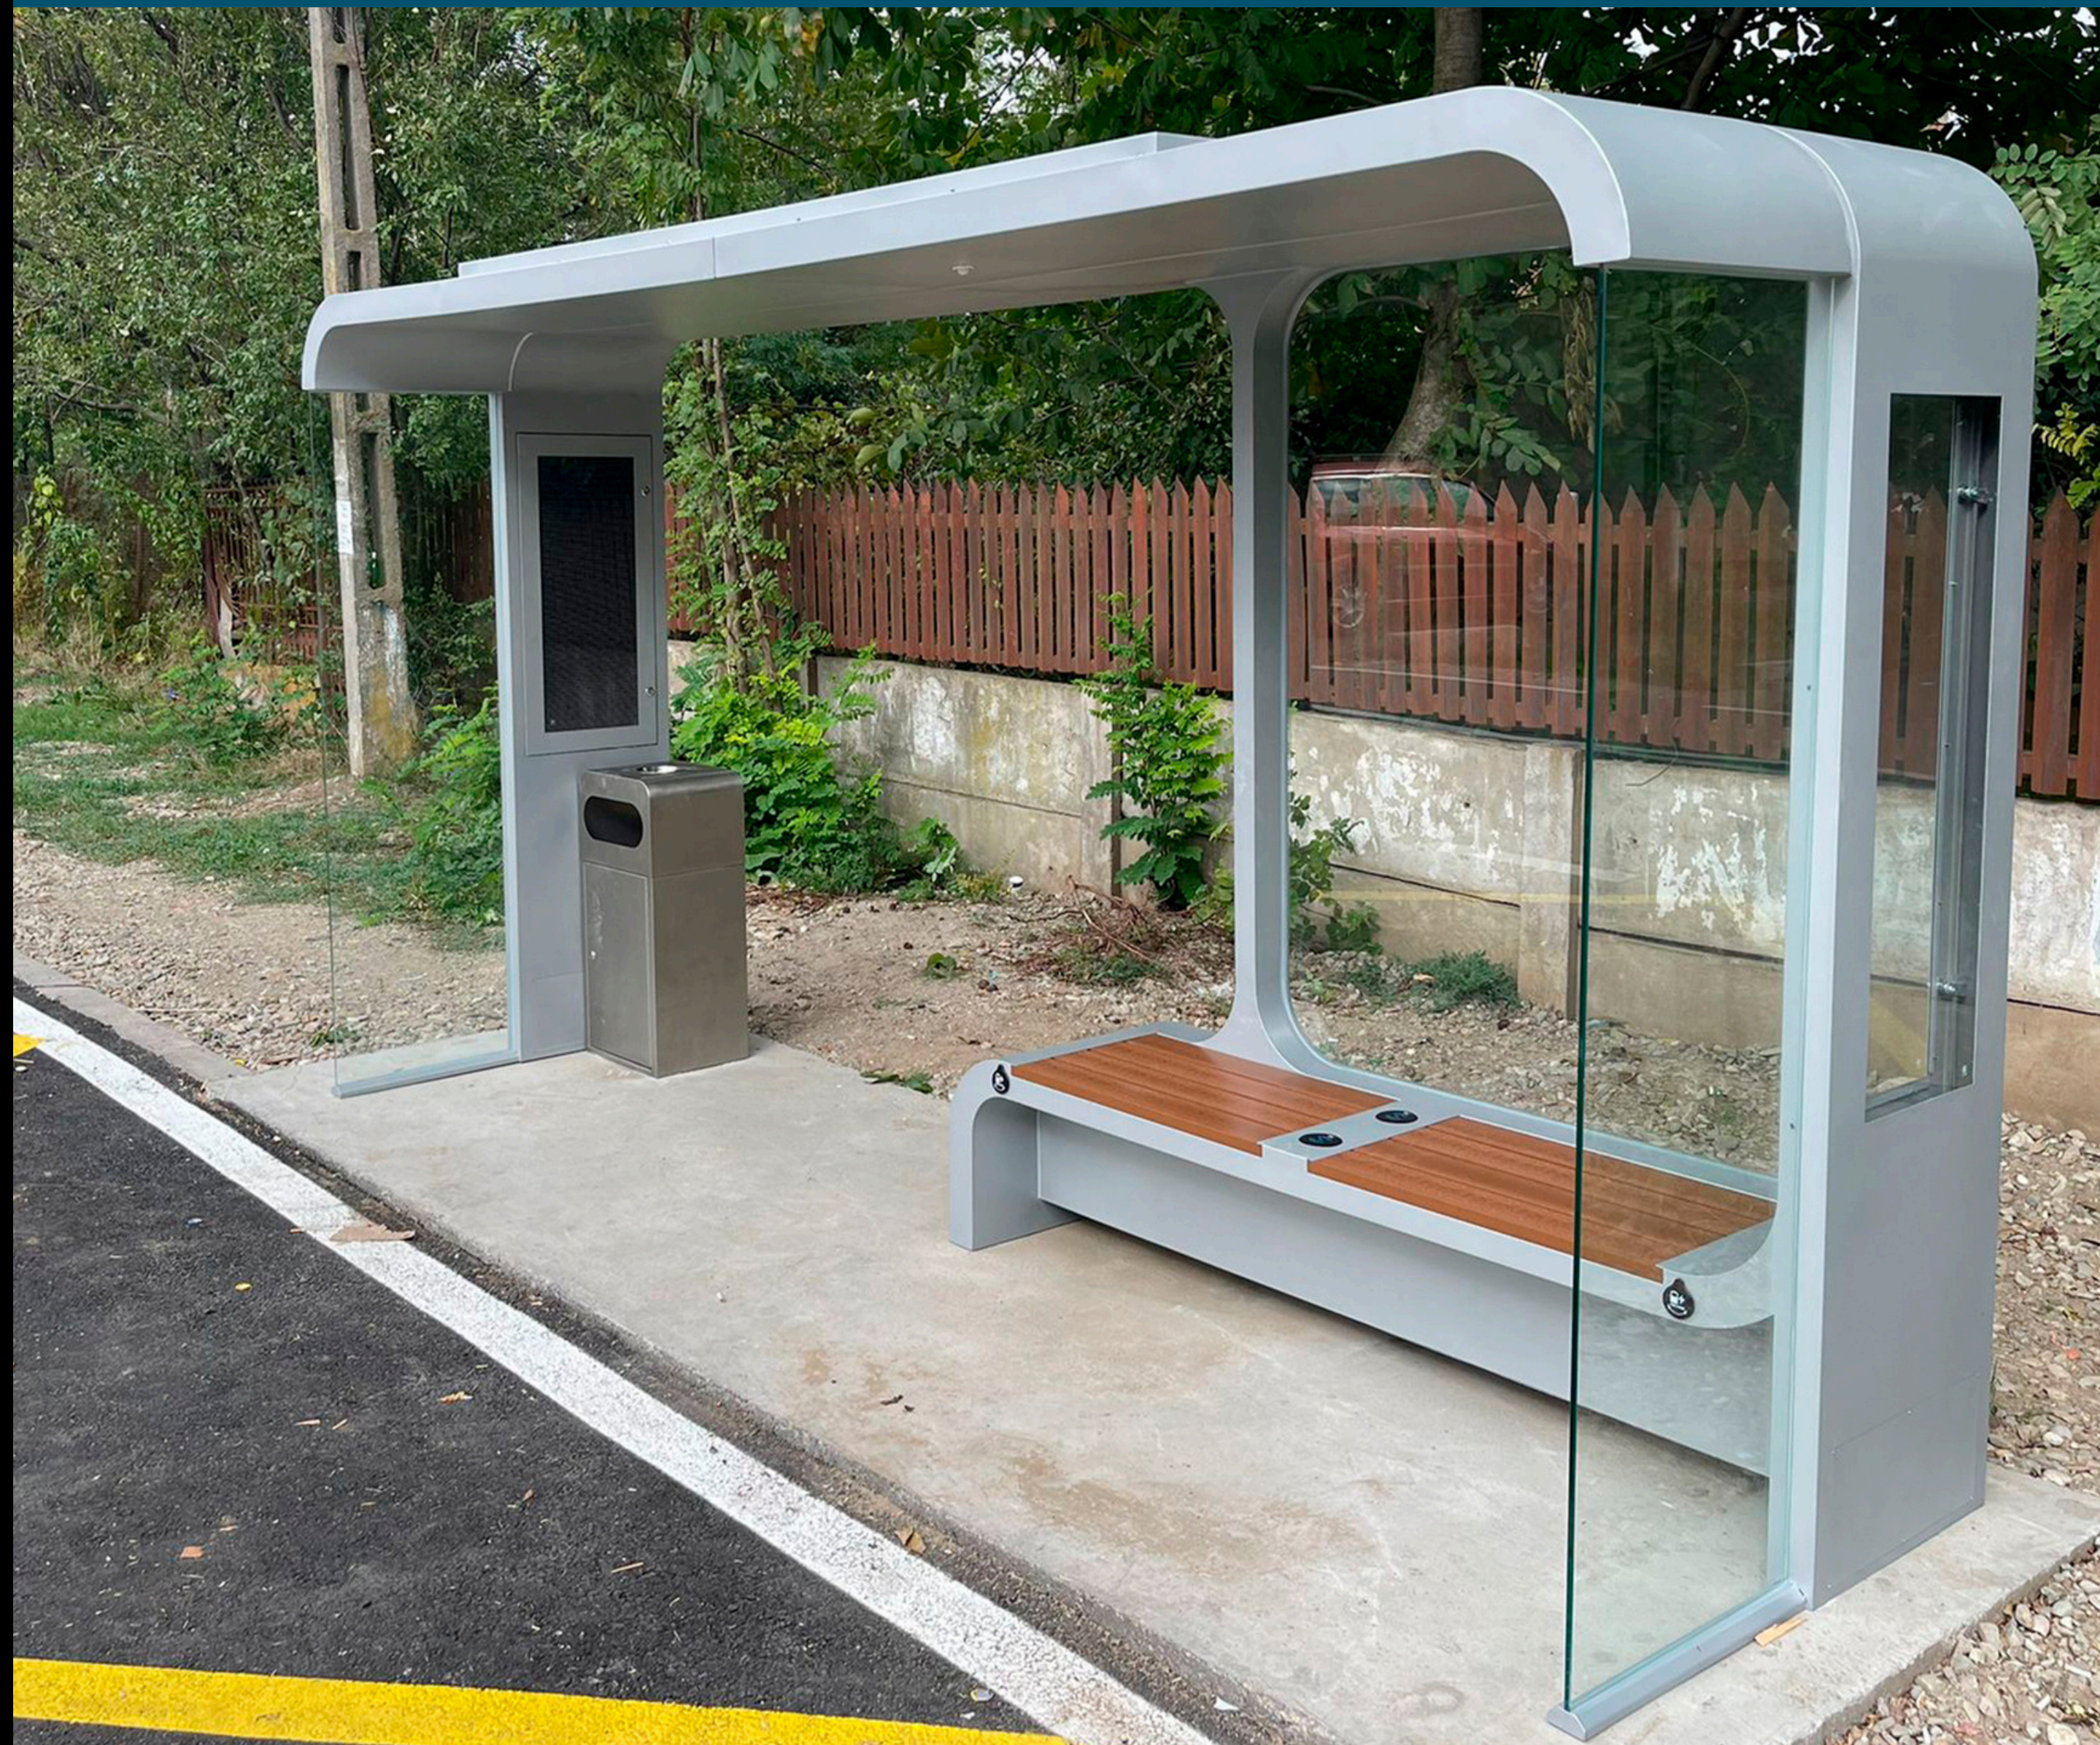



WYS1817

DATA SHEET

-  Solar panel
-  Gel battery/LifePO4/Lithium
-  Controller MPPT
-  USB charging ports
-  Wireless charging
-  LED Strip/Spot Light
-  Bluetooth speaker
-  4G International router
-  TV Display / LED SCREEN
-  AI Smart Box + Platform

Properties

| | | | |
|----------------------|--|------------|---|
| MODEL NUMBER | WYS1817 | Appearance |  |
| DIMENSIONS | 400 /110 / 222CM | | |
| N.W | 600 KG | | |
| G.W | 800 KG | | |
| CERTIFICATE | CE / ISO | | |
| FUNCTION | In sunlight mode, the product will charge a built-in battery by a solar panel, and then provide energy for phone chargers, lights and advertising display. Optional smart city with our platform. | | |
| Material | 201 STAINLESS STEEL + WPC WOOD - OPTIONS #304 / #316 | | |
| Solar panel | MONOCRYSTALLINE SILICON | | |
| Solar Power | 420W | | |
| AC POWER | AC POWER INVERTER: OPTIONAL | | |
| CONTROLLER | MPPT CONTROLLER | | |
| Battery type | GEL/LIFEPO4/LITHIUM BATTERY | | |
| Working temp | -20C-40C/-20C-65C | | |
| Battery capacity | 12V / 200AH | | |
| USB charger | 2 PC USB CHARGING PORTS: 5V/9V/12V (2.1A) | | |
| Wireless Charger | 2 PC - QI STANDARD | | |
| Sensors | MOTION SENSOR / OTHER SENSORS ARE OPTIONAL | | |
| Wifi router | WI-FI: 4G/INTERNATIONAL ROUTER | | |
| Bluetooth speaker | BLUETOOTH SPEAKER 5/12V | | |
| LED lighting | STRIP LIGHT: WARM WHITE/WHITE/RGBW | | |
| Large LED light box | 1 LED LIGHT BOX * 2 WINDOW | | |
| Display/LED screen | FULL COLOR, 1PC,320*800MM | | |
| 10 mm tempered glass | YES | | |
| NVIDIA Jetson Box | YES | | |
| Adlis smart platform | YES - CONTACT: MORI@ADLISSMART.COM FOR MORE INFORMATION | | |
| Smart Camera | OPTIONAL | | |
| Small LED light box | YES | | |
| SOS security | SOS BUTTON: OPTIONAL | | |
| Network broadcast | OPTIONAL | | |
| Smart voice | OPTIONAL | | |
| Bin compressor | NO | | |
| Disinfection | NO | | |
| Battery message | The controller works well above-40C. while the working efficiency of battery is getting less and less under 0C, when -10C it already doesn't work. Yet after the temperate rises back to over 0C, it will work again. Therefore, in very cold winter the chargers on bench don't work. In good sunshine, the battery is fully charged in about 7-8 hours. | | |

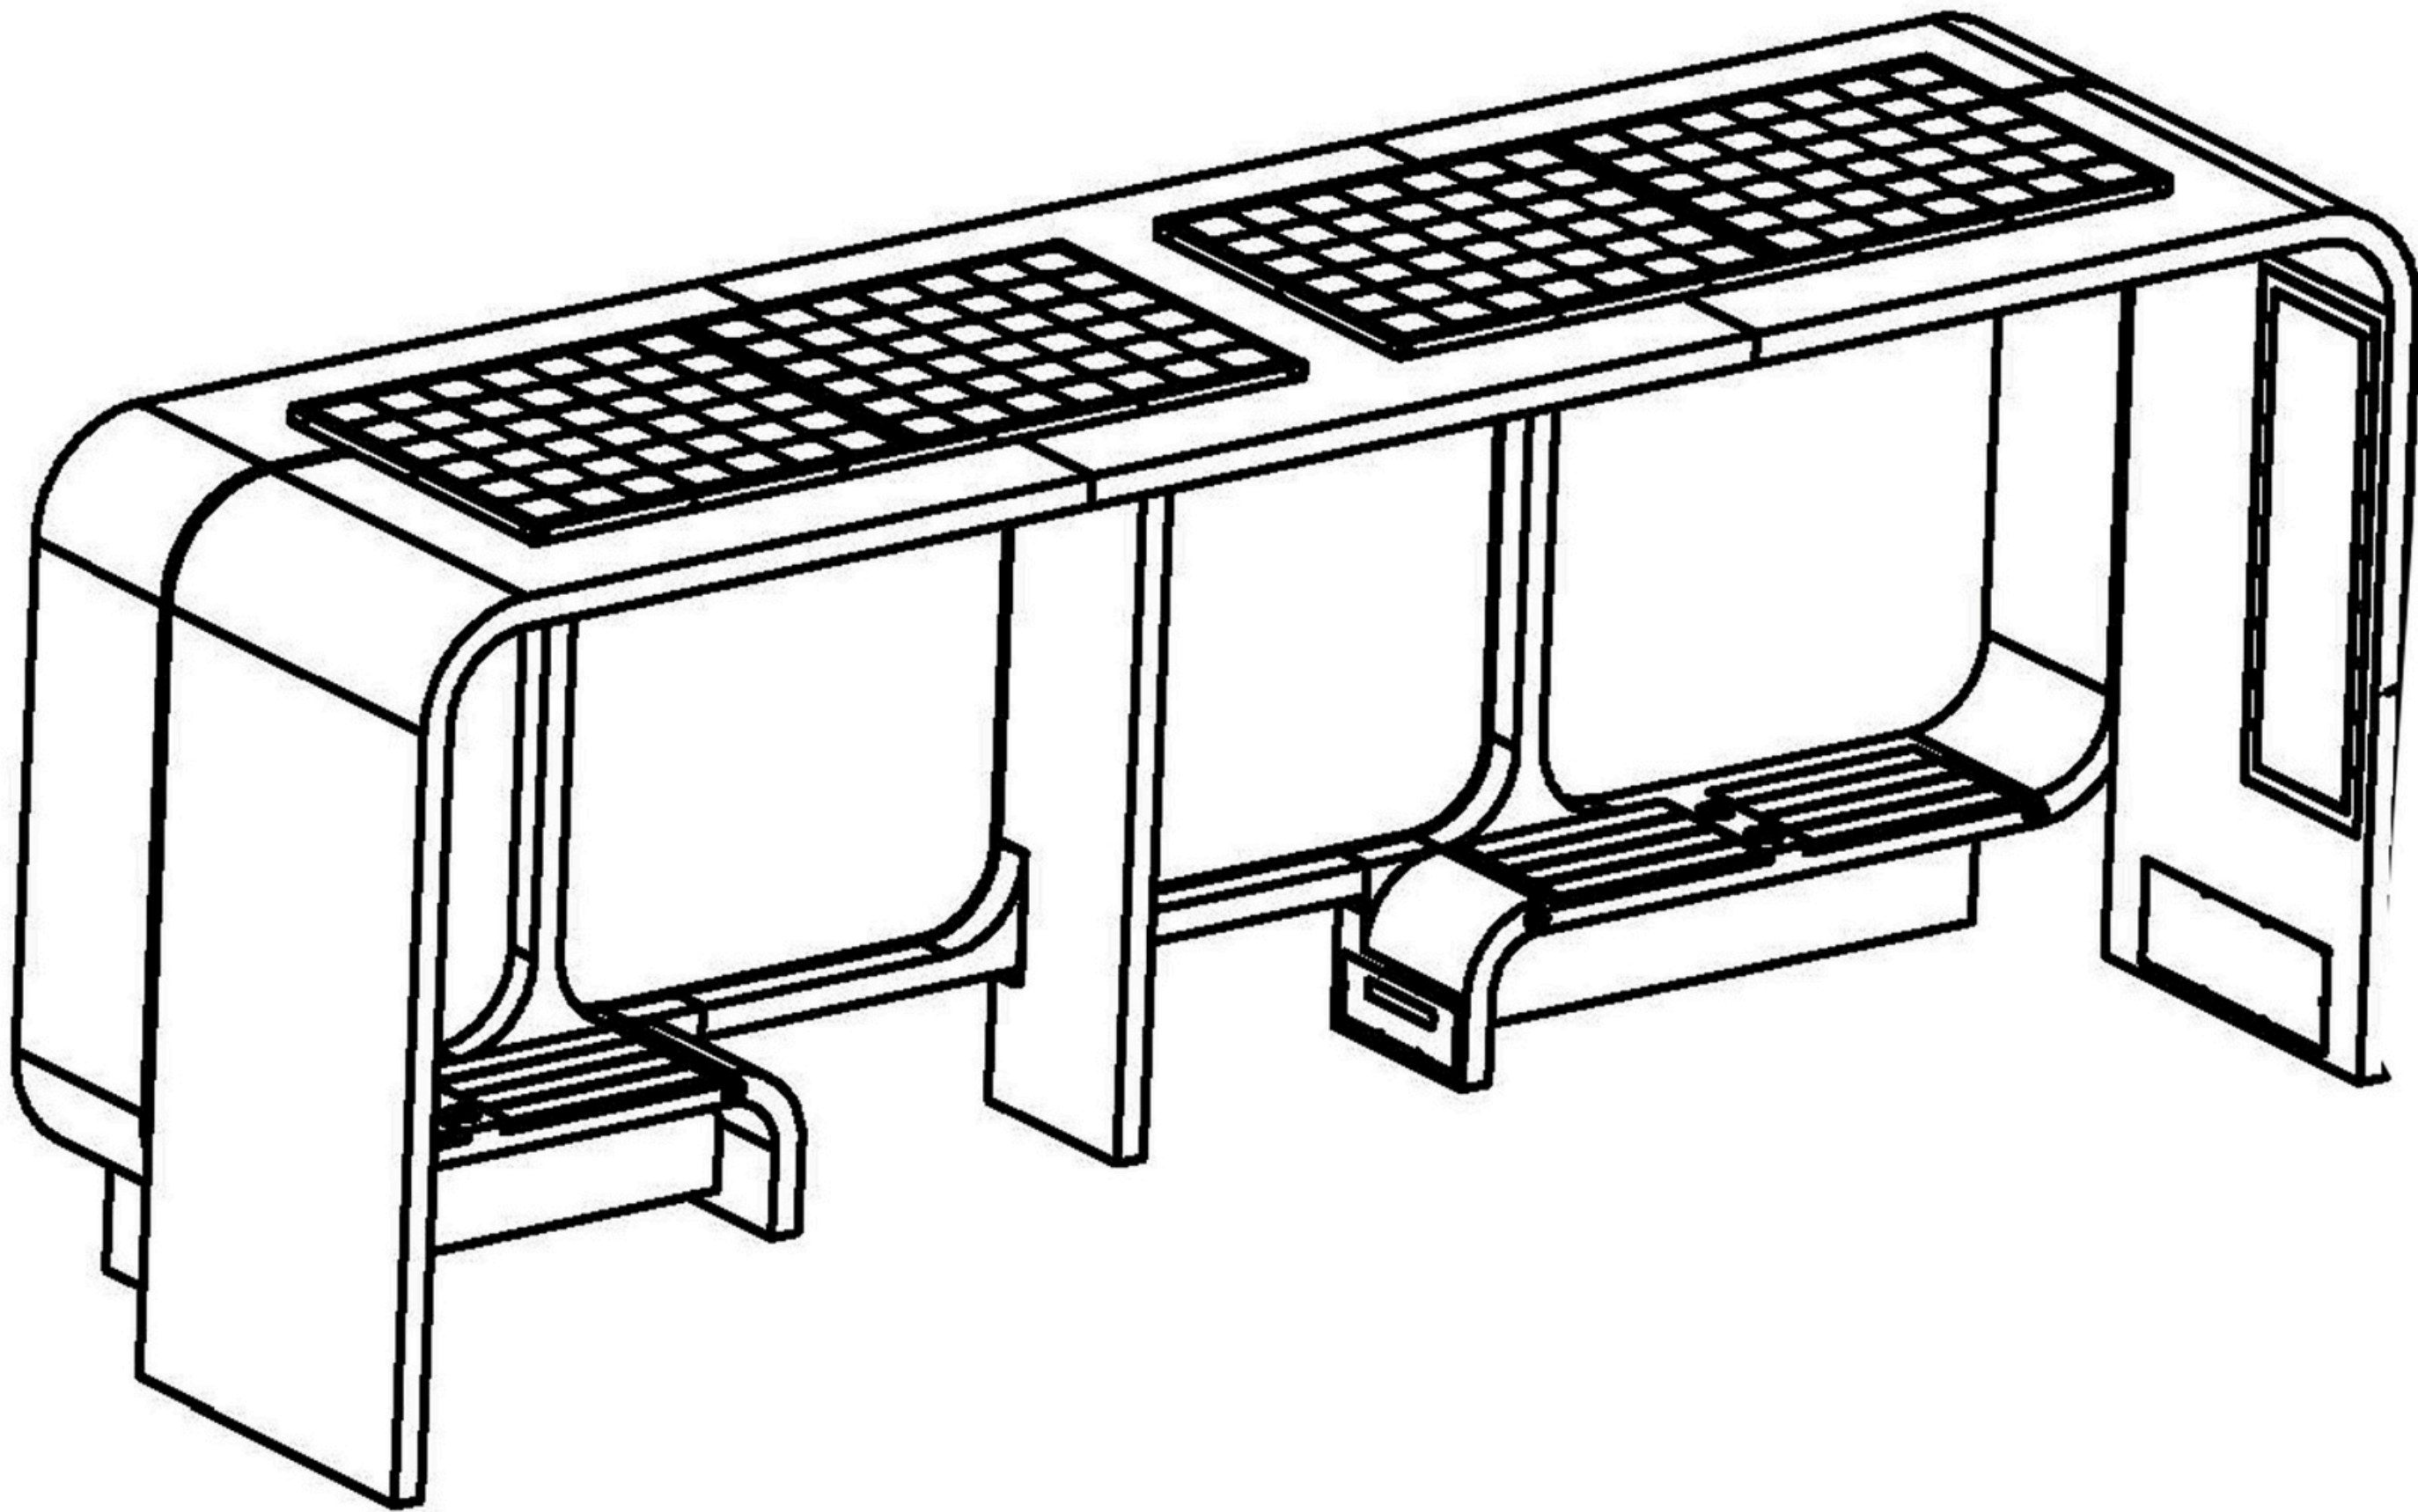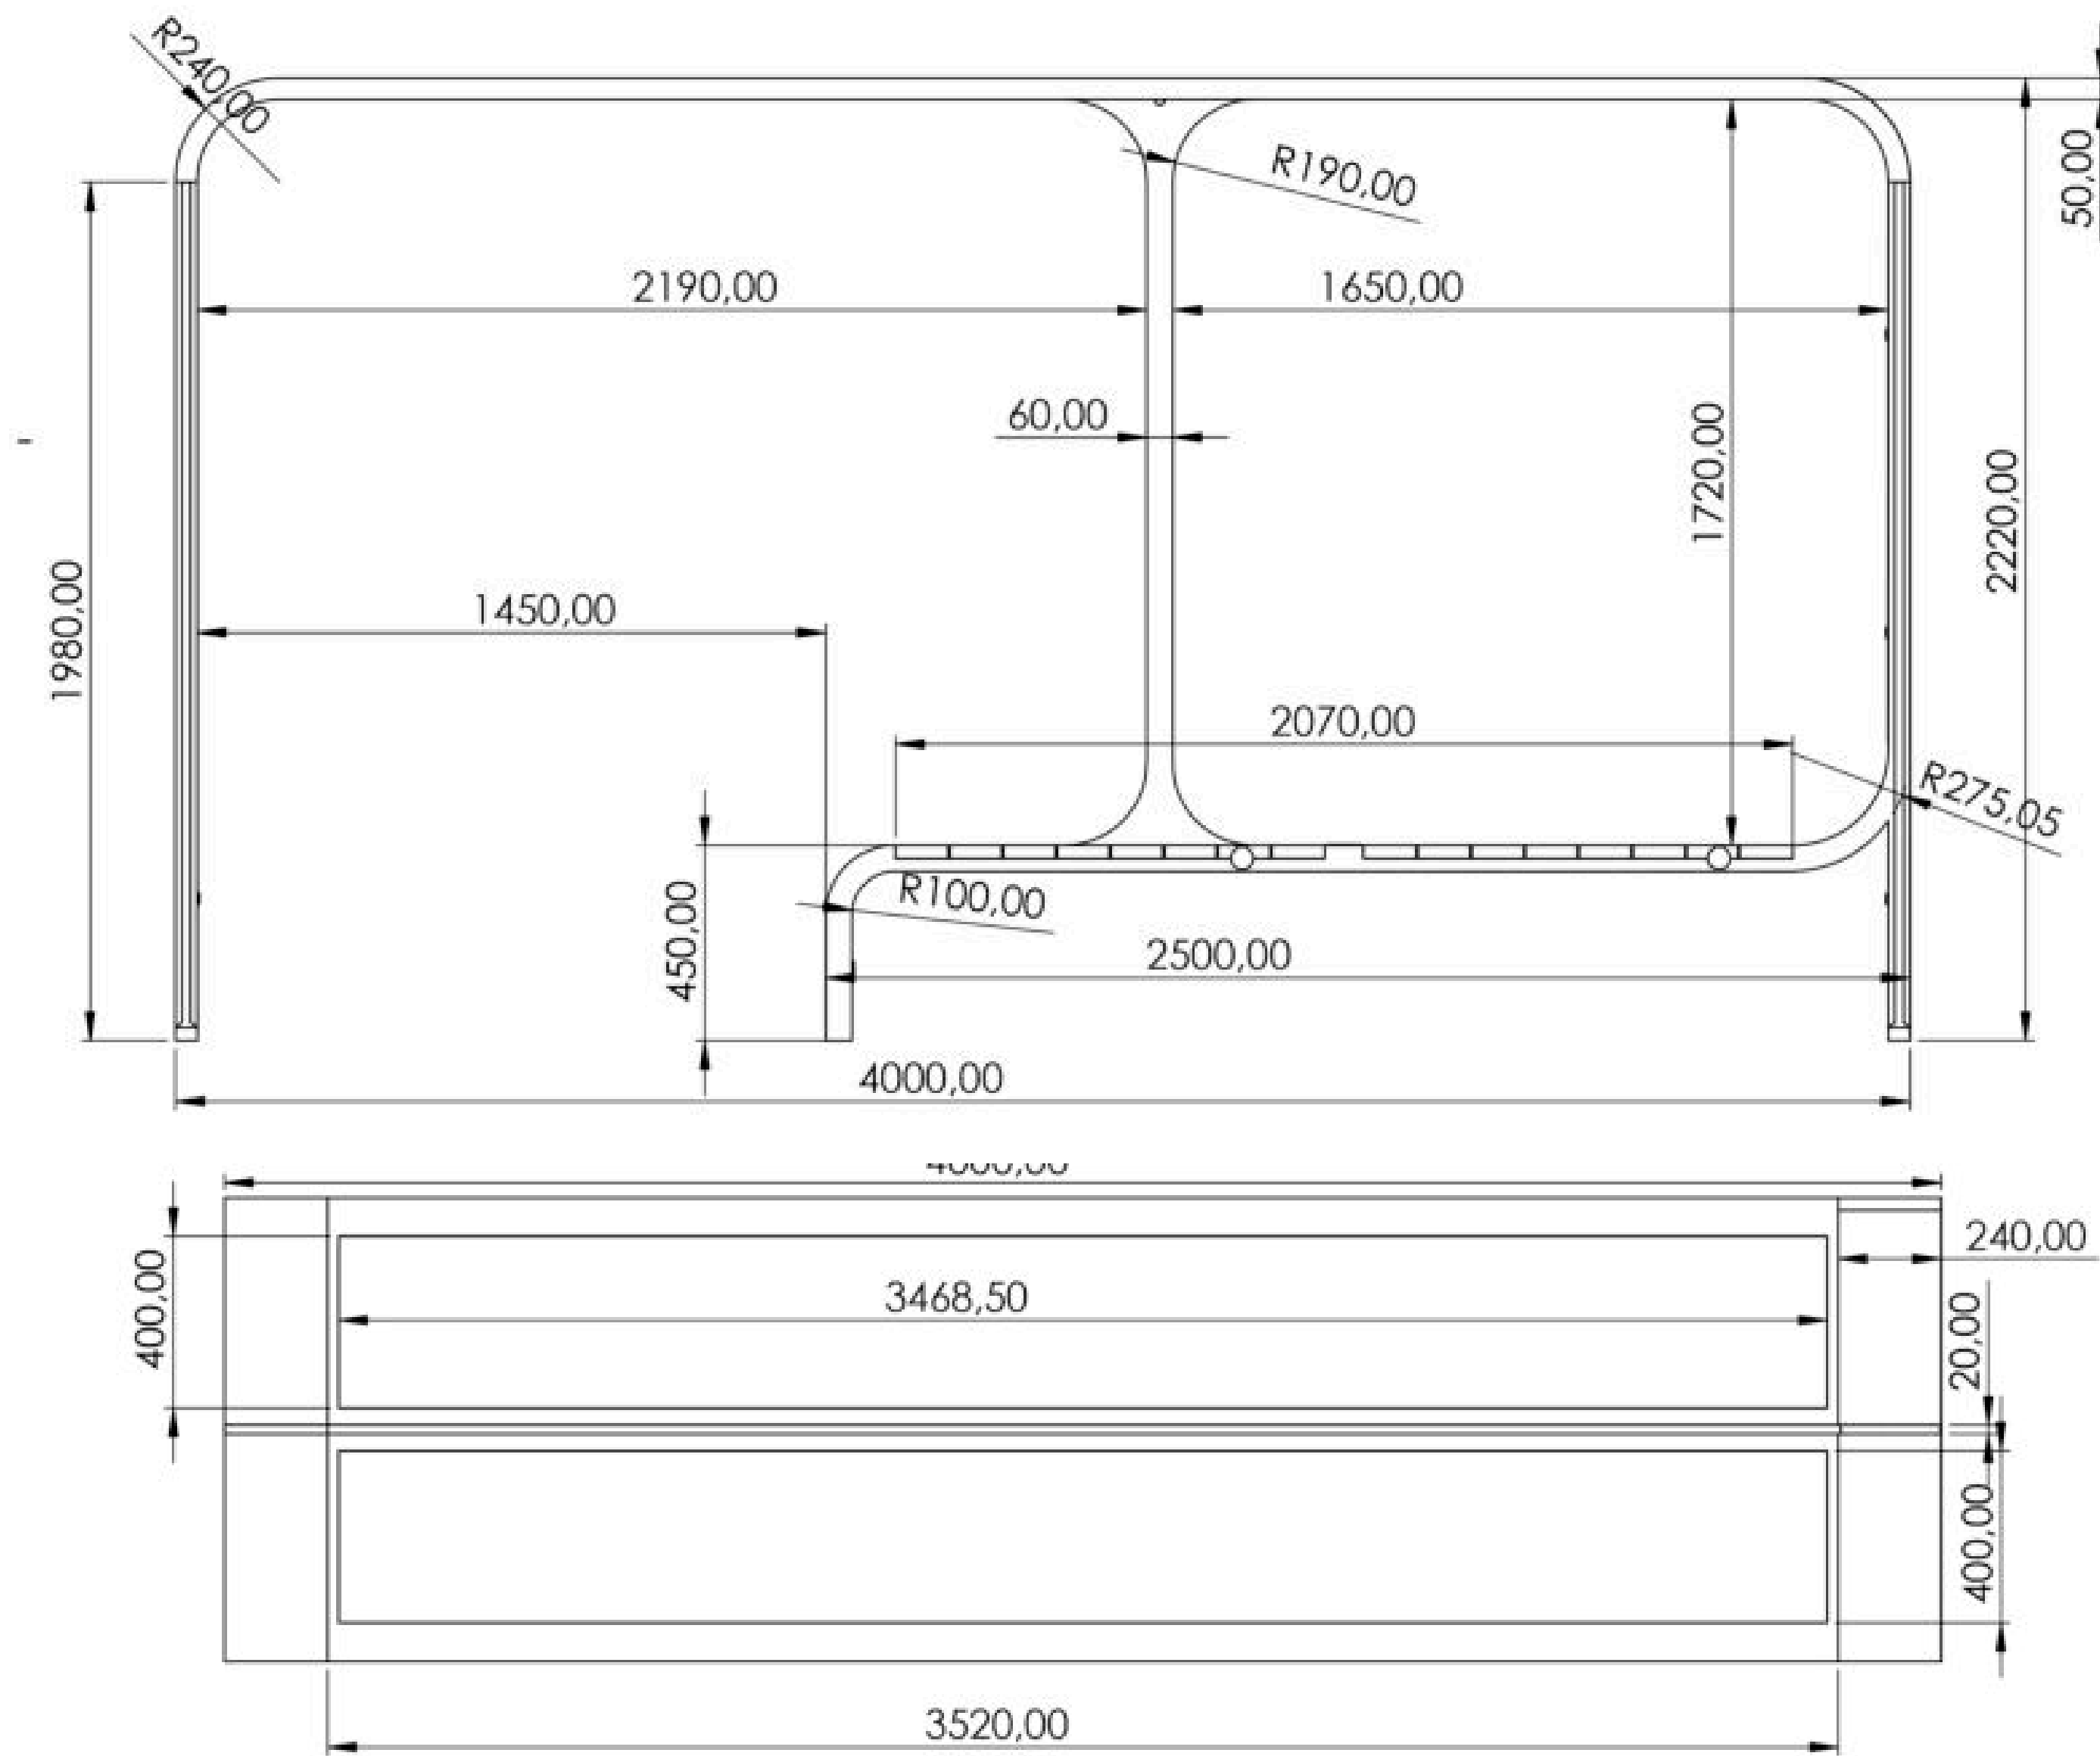

A. Description and function:

The Adlis Solar Mobile Charging Bus shelter is perfect for short term mobile multi-taskers or a connection space for focused tasks. its charges 2 devices simultaneously.

Works with all Apple, Android and other popular devices.

B. Intended use:



This product is for external use only. Please place it on a flat floor and away from any shade. If in the shade, the solar panel will not function effectively.

C. Package Content:

1 unit Adlis Solar Bench Smart

1 pc manual

1 set of expansion screw

D. Security instructions



ATTENTION

We recommended that a qualified person use it to assemble and disassemble the product to avoid any risk of product deterioration.


The product is self-service, meaning users do not need help charging their device

Read carefully and follow the safety instructions for handling, maintenance, storage and transport.

We recommended using the original packaging for transportation to protect the product from dust and moisture.

WE ARE NOT RESPONSIBLE FOR DAMAGE TO PEOPLE OR PROPERTY CAUSED BY IMPROPER INSTALLATION OR OPERATION THAT IS NOT DESCRIBED IN THIS MANUAL. ANY CHANGE AND/OR MODIFICATION TO THE PRODUCT OR ITS ACCESSORIES IMMEDIATELY CANCELS THE WARRANTY.

E. Connection and operation:

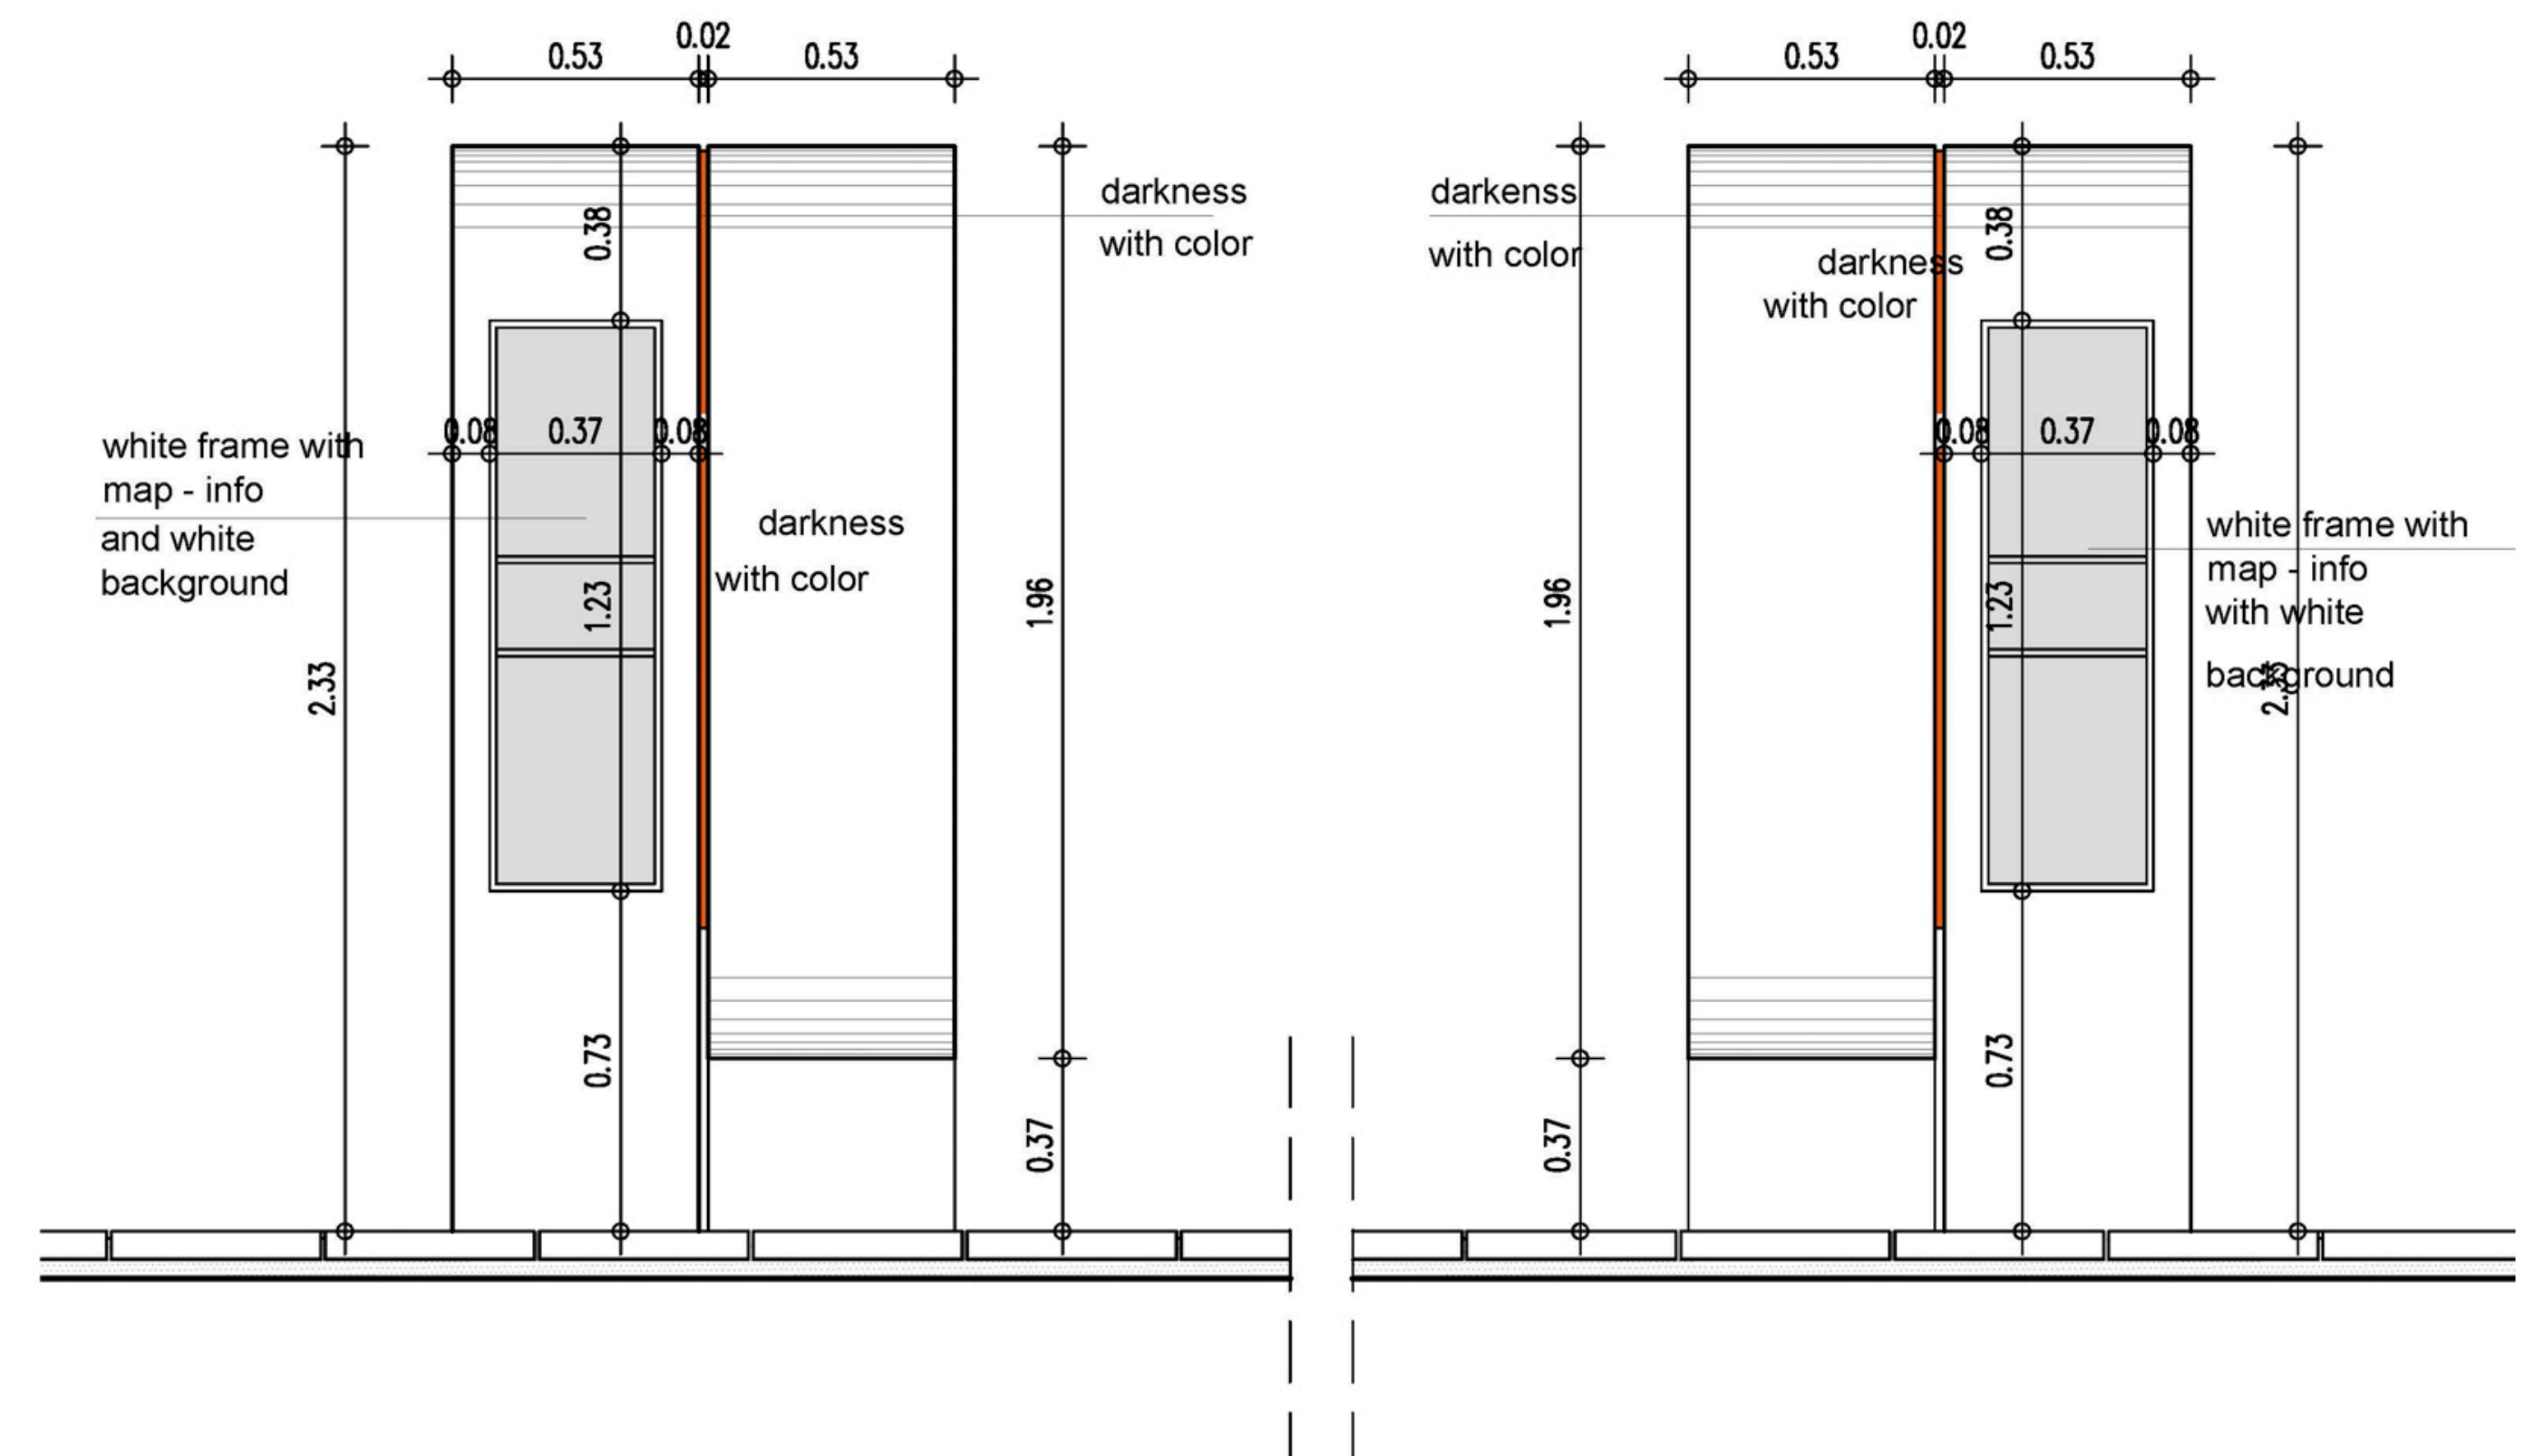

F. Care, Maintenance, Storage and Transport:



WARNING!

We recommended that a qualified person use it to assemble and disassemble the product to avoid any risk of product deterioration.

We provide a two-year conditional warranty for this device from the date of purchase

The warranty also does not cover accidental damage or vandalism caused to the products

The warranty also does not cover the charging cables. We have no control over how users treat the cables. Once the product is installed on your premises, replacement cables can be purchased at an additional cost.

WE ARE NOT RESPONSIBLE FOR DAMAGE TO PEOPLE OR PROPERTY CAUSED BY IMPROPER INSTALLATION OR OPERATION THAT IS NOT DESCRIBED IN THIS MANUAL. ANY CHANGE AND/OR MODIFICATION TO THE PRODUCT OR ITS ACCESSORIES IMMEDIATELY CANCELS THE WARRANTY.



INSPIRATION NEW NEW CONCEPT



We don't make the future, we make the future better.




www.adlissmart.com

INSPIRATION NEW CONCEPT NEW




We don't make the future, we make the future better.

www.adlissmart.com

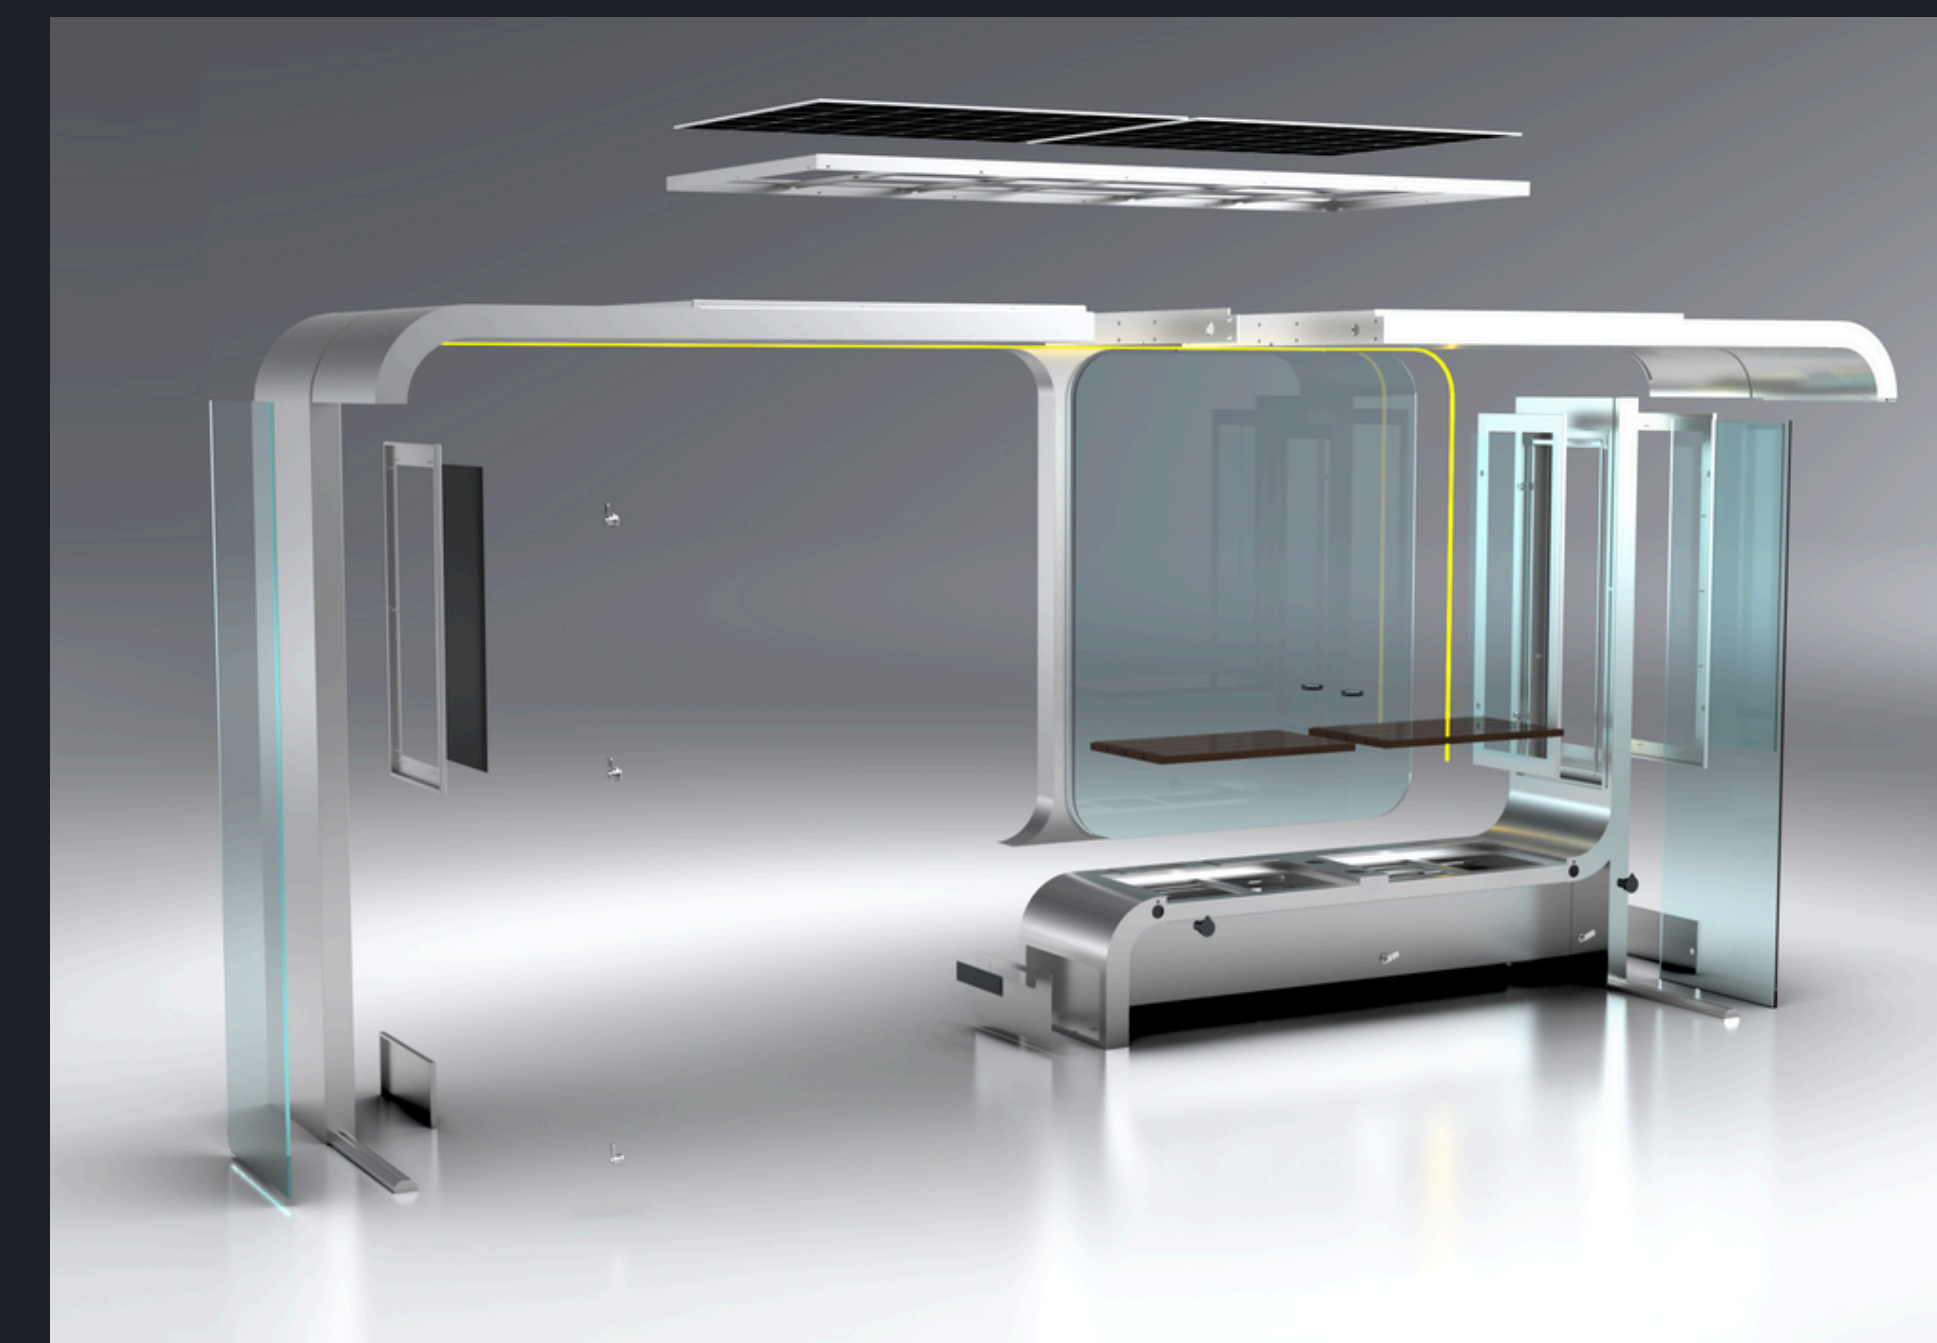



REMARKS: ALL PRODUCTS ARE PACKED IN POLYWOOD BOXES.

| BRANDS AND NUMBERS | PROPERTY DESCRIPTION | UNITS | UNITS/CTN | CTNS | G.W. KGS | N.W. KGS | MEAS (CM) |
|--|----------------------|----------|-----------|----------|---------------|---------------|--------------------|
|  | WYS1817 | 1 | 1 | 1 | 800 KG | 600 KG | 440*110*230 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| Total | | 1 | 1 | 1 | 800 KG | 600 KG | 11.41CBM |

This packing detail is for 1 Pc sample, for bulk order the detailed packing details we be provided before shipment.

CONTACT US



E-MAIL:

sales@solarbenchchina.com

E-MAIL:

info@adlissmart.com

PHONE:

0086 13823126631

WEB:

www.adlissmart.com

www.solarbenchchina.com