



WYS1817-12m bus shelter Installation Manual

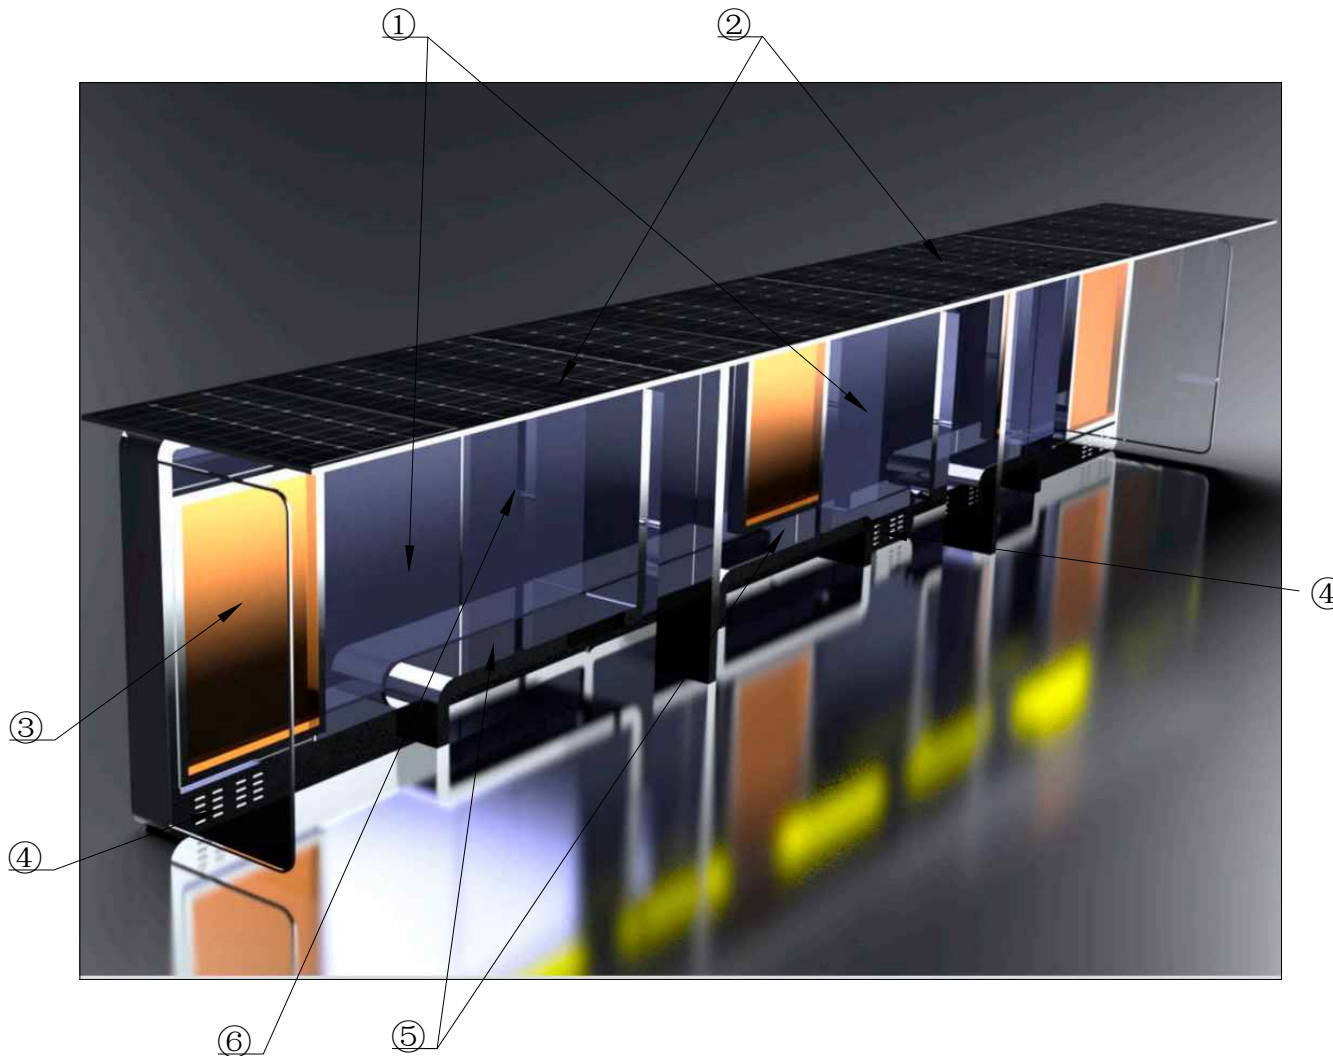

1. Select a flat surface for mounting the bus shelter main structure. Drill holes in mounting base in configuration shown as picture to accept bolts.
2. Hoist the three back frames (Item 1) of bus shelter and assemble together with screws. Secure screws onto bolts under the ground.
3. Assemble the middle columns (item 6) between the three back frames (Item 1) and benches (Item 5). Secure the screws.
4. Put three solar panel frames (Item 2) on top and connect underneath solar panel cables together, in matching color.
5. Connect the solar panel wire connectors of the three bus shelter back frames (Item 1).
6. Fix the two glasses (Item 3) on the sides and secure the screws using phillip screw driver.
7. Open maintenance door(Item 4) on the benches (Item 5), ensure all screws are fixed tightly and battery is turned on to complete installation.
8. Notice: the product is rather heavy, pls use lifting equipment safely to complete the installation


ADLIS
WEIYIN

WYS1817-12M
BUS SHELTER INSTALLATION MANUAL

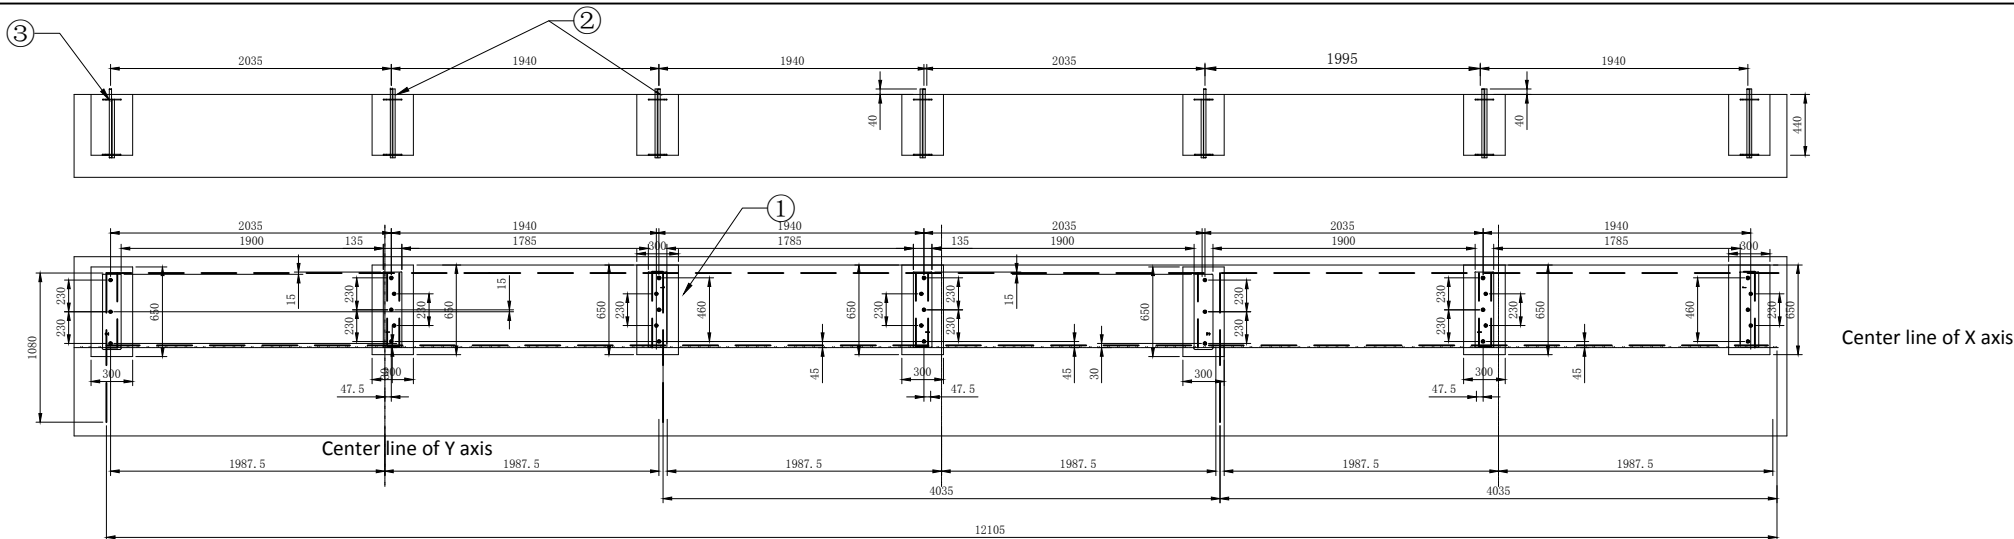

Mounting base Installation Step:

1. Select a flat surface for mounting the bus station. Draw the layout of the bus station and bolt hole position on the mounting base (Item 1) in configuration shown as picture and take the center line of X / Y axis as the reference line.
2. Drill the three bolt holes in configuration shown as picture, level the bottom and make sure the depth is correct.
3. Configure anchor bolt (Item 2 and 3) into bolt holes, using bolt distance to Y axis as instructed to fix the position. Make sure all bolts shall be on the same level.
4. Fill bolt holes with concrete till same level as the ground, completed shown as the picture.
5. Install the bus station after 7 days when the concrete is completely dry.

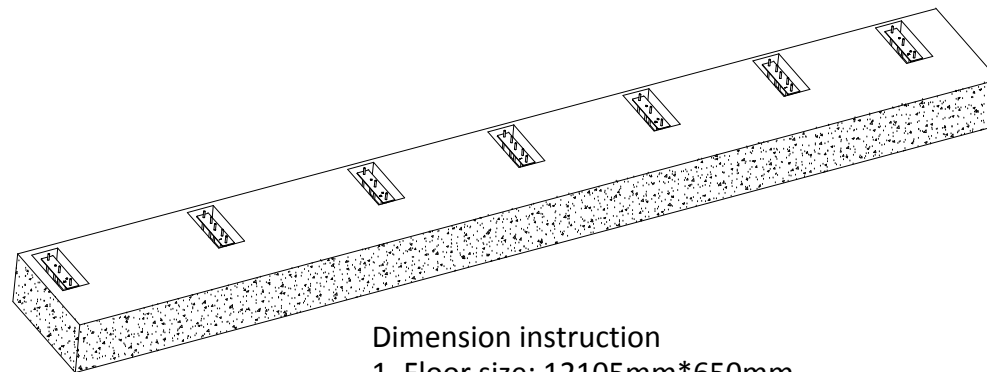

Dimension instruction

1. Floor size: 12105mm*650mm
2. Bolt hole size: 650mm*300mm*depth440mm
4. Embedded concrete level above the ground: 40mm



WYS1817-12M
BUS SHELTER INSTALLATION MANUAL

ASSEMBLY LIST			
PART	NAME	DIMENSION	QUANTITY
1	Mounting base		
3	Embedded bolt		7PCS